
specifications



BME1500-A Series

Bottom Mount ActiveCore Three Door Upright Chiller

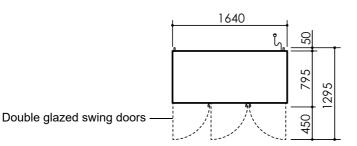

CABINET DIMENSIONS

 External
 Internal

 Height:
 2005mm* / 2195mm**
 1454mm

 Width:
 1640mm
 1540mm


 Depth:
 795mm
 602mm

 Floor area:
 1.34m² (includes door handle)

- Height 2005mm without sign (model BME1500-A)
 Height 2195mm with sign (model BME1500-AC)
- *** Depth 745mm excludes removable door handle, door
- 745*** 50

 Rear

 | Dimensional tolerances | Before installing this cabinet allow the following dimensional tolerances:

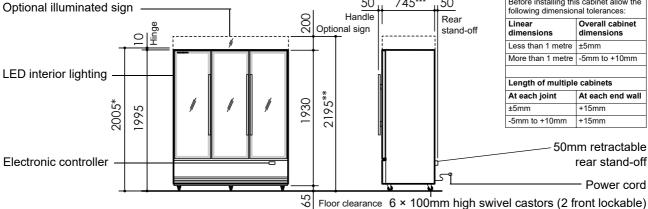

Copyright © 2016 SKOPE Industries Limited

GENERAL SPECIFICATIONS

Temperature range 1°C to 4°C (adjustable up to 15°C)

Climate class 5 (Tested at 43°C)

Doors Lockable, self-closing, double glazed, single Low-E, argon filled, toughened safety glass swing doors (hinged

LH, LH, RH)

Internal Volume 1433 litres

Interior lighting 2 × 20W T8 LED tube (Ø26mm × 1350mm) side lights and 1 x 20W (1400mm) LED module strip pillar light

Power supply 220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug

Current draw 4.8 Amps (includes unit 4.0 Amps)

Refrigeration system Removable ActiveCore bottom mount refrigeration unit (UBHCCI-0003)

Refrigerant R134a / 475g Nominal capacity 1000 Watts

Controller Carel S4 electronic controller

Drainage No plumbing required

Weight 330 kg

INDIVIDUAL SPECIFICATIONS

 Model
 BME1500-A
 BME1500-AC

 Part number
 SM15GV
 SM15BV

SKOPE Industries Limited reserve the right to alter specifications without notice.

SignNo sign200mm high illuminated sign

Sign lighting n.a. 1 × 22W T8 LED tube (Ø26mm × 1500mm)

Shelves 12 × wire and 3 × stainless steel 15 × wire and 3 × stainless steel

Wire shelves: Adjustable height, 490 wide × 520 deep (side), 540 wide x 520 deep (middle)

Stainless steel bottom shelf: Not adjustable, 485 wide × 515 deep (side), 545 wide x 515 deep (middle)





PSS0469 Rev. 3.0 Mar. 2018