


specifications

SK1500-2


GEN 2: Top mounted three door chiller

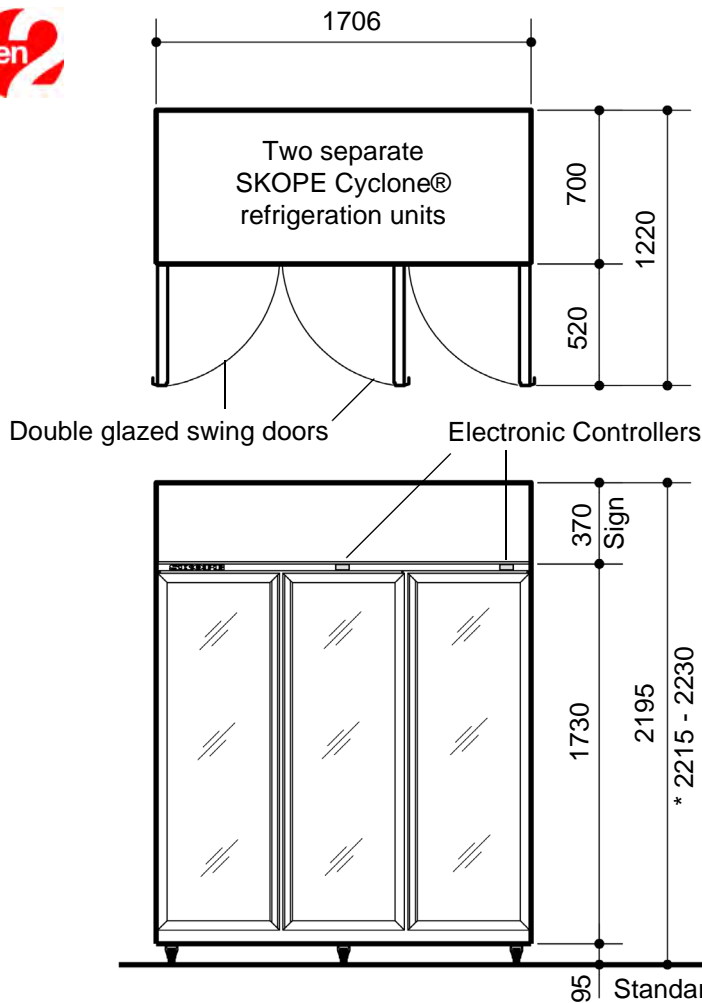

CABINET DIMENSIONS

	External	Internal
Height:	2195mm	1570mm
adjustable:	2215 to 2230mm *	
Width:	1706mm	1606mm
Depth:	700mm	555mm
Floor area:	1.19m ²	
Insulation:	50mm polyurethane foam	

* Height with optional adjustable castors

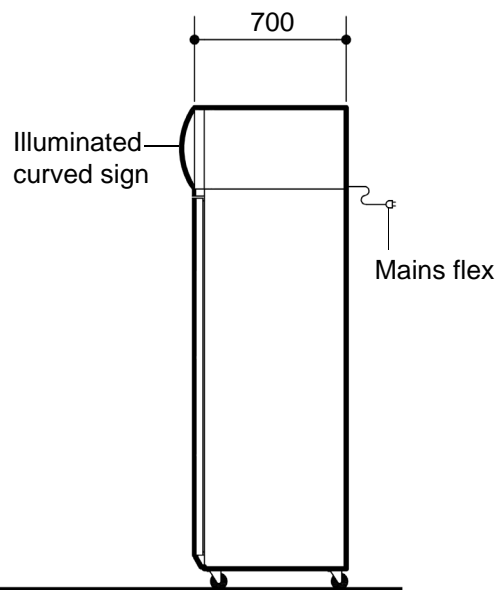

Copyright © 2003 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Two separate, top mounted, electronically controlled SKOPE Cyclone® refrigeration units
Refrigerant:	R134a / 450 g
Nominal capacity:	1250 Watts
Cabinet internal volume:	1536 litres
Cabinet temperature range:	+1°C to +4°C
Electrical:	220-240 Volts a.c. 50 Hz, single phase supply, 7.1 Amp
Internal lighting:	2 sidelights: 35 Watt T5 fluorescent tubes (Ø16mm x 1450mm) 2 centre pillar lights: 35 Watt T5 fluorescent tubes (Ø16mm x 1450mm)
Sign illumination:	1 x 35 Watt T5 fluorescent tube (Ø16mm x 1450mm)
Internal door opening size:	2 outside doors: 1570mm x 455mm, 1 centre door: 1570mm x 478mm
Door:	3 self-closing, aluminium framed, double glazed swing doors
Shelves:	10 outside shelves: 502 x 460mm, 5 centre shelves: 571mm x 460mm
Total weight:	300 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

Rev 1.1 Nov. 2010



SKOPE INDUSTRIES LIMITED



New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533

Email: enquiry@skope.co.nz Website: www.skope.co.nz