

specifications



CC500-3SW

Counterline - Slimline
3 Door (Swing), Integral Fridge

CABINET DIMENSIONS

	External	Internal
Height	725mm*	545mm
Width	2210mm	1730mm
Depth	600mm	485mm
Floor area	1.33m ²	
Gross volume	517L	

* Height excludes castors or legs

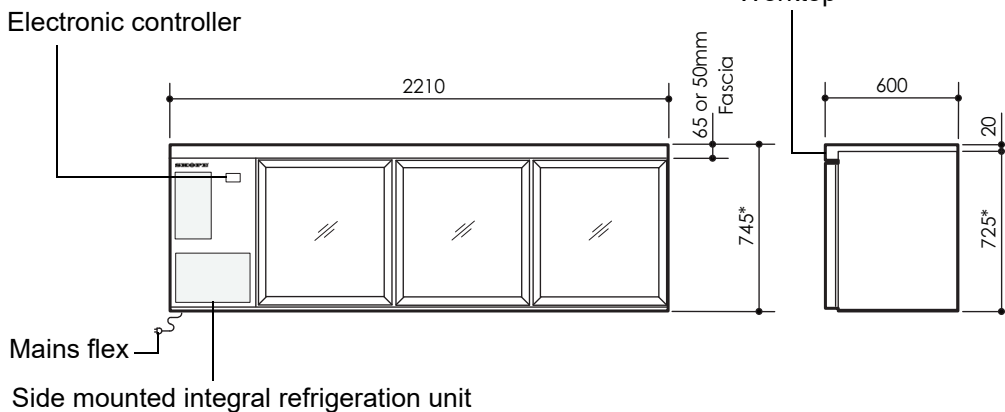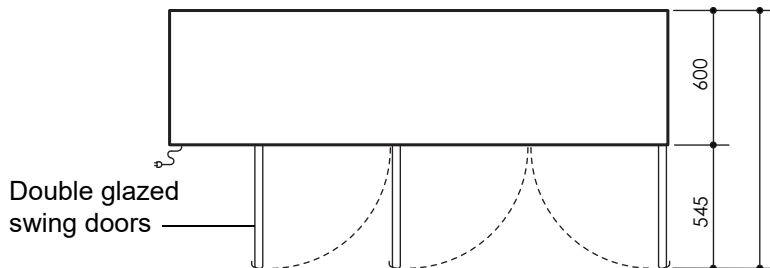

CABINET SPECIFICATIONS

Doors	Self-closing, double glazed, toughened Low-E safety glass with aluminium extrusion or insulated solid doors
Internal door opening size	3 door openings: 544mm high x 520mm wide
Shelves	Adjustable height, white plastic coated, steel wire shelves - two per door
Worktop (optional)	Optional 20mm high stainless steel worktop with 65mm fascia
Electrical safety climate class	5
Internal lighting	1 x 24W T8 Frosted LED Tube (Ø26 x 1500mm, 5500K) - Switched
Electrical	230-240 Volts a.c. 50 Hz, single phase supply, 3.2 Amps
Temperature range	+1°C to +4°C
GEMS class	M1
GEMS energy consumption	6.82 kWh/24h
GEMS annual running cost	\$747 p.a. (@ \$0.30/kWh)
Refrigeration system	Side mounted, integral refrigeration unit (UE12AAC-173ZC)
Electronic controller	SKOPE CAREL ir33
Refrigerant	R134a / 425 g
Nominal capacity	581 Watts
Insulation	50mm polyurethane foam
Drainage	No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2007 SKOPE Industries Limited

PSS0069 Rev. 4.1 Mar. 2021